



General features

- Silver grey
- Height 0.200 gr
- Zinc coated lid
- Degree of protection IP54
- High resistance to contamination
- Durable composite material lens
- Angle measurement scale (optional)
- Compact and easy installation
- Two scala
- Custom scale models can be made

Gravity indicator LSN1


It is resistant to dusty areas with its high anti-pollution capacity easy installation and high performance

In real time, you can change the location of the units by using tespitte and Semi absolute is used for measurements.

As a general feature Long distance measurement high measurement accuracy clear measurement

gravity indicator non-contact measurement Horizontal or 60 degrees mounted on the axle (shaft) is used to determine the correct position.

Indicators are widely used in glass machines, food machines, ceramic machines, packaging and as setting indicators in printing presses.

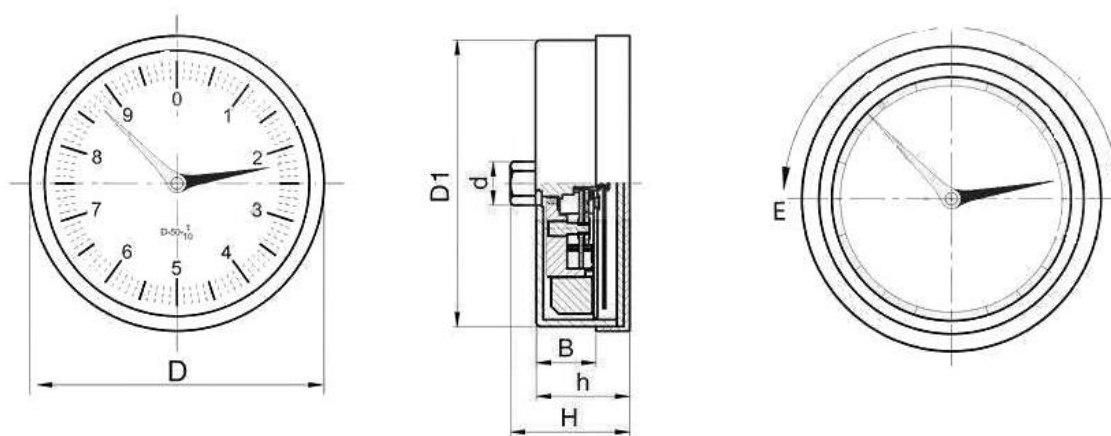

Sample order code : LSN1 - D - Scale - (i / e)

D	D1	d	H	h	B	Scale	clockwise	anti-clockwise
56	54	8	28	23.5	13	5 - 10 - 12 - 20 - 25 30 - 40 - 50 - 100	i	e
81	79	8	28	23.5	13			
86	84	8	28	23.5	13			
106	105	8	28	23.5	13			